

# MA300-BT

## Metallic Casing Outdoor Access Control



MA300-BT, one of the innovative biometric fingerprint readers for access control applications. Offering unparalleled performances by adopting an advanced ZK fingerprint algorithm for reliability, precision and excellent matching speed.

It is metallic casing and IP65 rated which enables it to be resistant from water, dust and other outside damages.

MA300-BT offers the flexibility to be installed standalone or with any third party panels that support 26-bit wiegand. User can be enrolled by the administrator card when the device works in standalone mode. TCP/IP is available, so that the device can be connected easily and conveniently.

It supports Bluetooth communication , mobile phone App management, And realizes access control ,user information registration, devices setting up.



### Rugged Structure and Extra Durability

- IP65 rated waterproof and dustproof structure



### Metallic Casing

- Vandal-proof for outdoor installation



### Fast and Accurate Fingerprint Algorithm

- 1 touch a-second user recognition
- Store 1,500 templates, 10,000 cards and 100,000 transactions



### Easy Installation and Connectivity

- Wiegand input & output
- Network interface by TCP/IP



### Full Access Control Features

- Anti-passback
- Access control interface for 3rd party electric lock, door sensor, exit button, alarm and doorbell



### Bluetooth Communication

- Mobile phone App Management
- Access control , user information registration and devices setting up

# Specifications



|                                  |  |
|----------------------------------|--|
| Fingerprint Capacity             | 1,500 templates  |
| Card Capacity                    | 10,000   |
| Transaction Capacity             | 100,000  |
| Hardware Platform                | ZEM720   |
| Sensor                           | ZK Optical Sensor  |
| Algorithm Version                | ZK Finger v10.0  |
| Communication                    | RS485*,TCP/IP,USB-host,Bluetooth   |
| Interfaces for Access Control    | 3rd party electric lock, door sensor, exit button, alarm                         |
| Wiegand Signal                   | Input & Output   |
| Standard Access Control Function | RS485 Reader, Time Zone, Group, Multi-identification, Duress mode, Anti-passback |
| Optional Functions               | Mifare, external USB keypad  |
| Display                          | N/A  |
| Power Supply                     | 12V DC   |
| Operating Temperature            | -10 °C - 60 °C   |
| Operating Humidity               | 10% - 90%  |
| Protection Grade                 | IP65   |
| Dimension(W×H×D)mm               | 73×148×34.5  |
| Gross Weight                     | 1.15kg   |

\* Note: RS485 is for RS485 readers.


## Optional Accessories

## Configuration

## Dimensions (mm)



Bluetooth

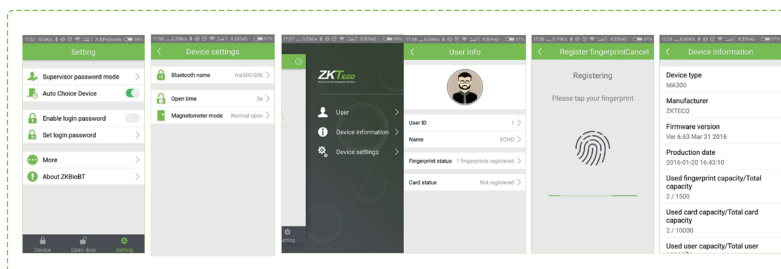

## ZKBioBT APP Download



Scan the following QR code with your mobile phone, and download and install the APP. Mobile phone requirement for APP installation: Andriod OS later than version 4.3, compliant with the Bluetooth protocol later than 7.1, devices later than iphone 4s.

